



3.5" Motorcycle Auxiliary Lights - User Manual




Specifications(Pair)

Model	3.5" Dual Beam	DRL Power	5W
Operating Voltage	DC 9-36V	DRL Color	Amber
Low Beam Power	55W	Waterproof Rating	IP68
High Beam Power	45W	Mounting Size	0.75"-1.25" Tubular Bar
Combo Beam Power	108W		

Notes

- The included wiring harness is recommended to ensure all functions operate correctly.
- This product is designed for independent wiring installation.
- Due to the integrated multi-function controller, some advanced functions may not be available when used with third-party motorcycle lighting controllers.
- Do not look directly into the light beam when the light is operating.
- Check local regulations regarding auxiliary lighting use before riding.

Wiring Instructions

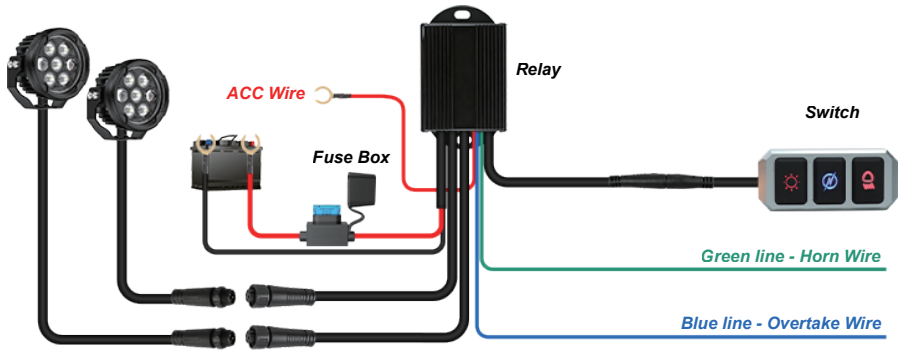

- **ACC Wire: Ignition trigger wire**

⚠ The ACC wire must be connected for the light system to work properly.

- **Blue Wire: Passing Light Trigger**

Connect to motorcycle passing light positive wire, When activated, high beam turns on.

- **Green Wire: Horn Flash Trigger**

Connect to horn positive wire. When the horn is pressed, combo beam flashes for 3 sec.

The Blue and Green wires are optional. If not connected, cap or insulate the wire ends securely. Do not leave exposed conductors.

- **Switch Button Instructions:**

Button	Operation	Function
 Main Light	Single Press	Low Beam
	Single Press Again	High Beam
	Double Press	High + Low (Combo Beam)
	Press & Hold (3 sec)	Turn Main Light OFF
 DRL	Single Press	Amber DRL ON / OFF
 Flash	Single Press	Synchronous Flash
	Single Press Again	Alternating Flash

Warranty

- **Duration:** 2-Year Warranty from the date of purchase.
- **Coverage:** Manufacturing defects, LED failure, waterproofing issues.
- **Exclusions:** Damage from misuse, crashes, modifications, or improper installation.



Visit us on www.led-colight.com for your offroad needs.
For any additional assistance or inquiries, feel free to contact
our customer support at support@led-colight.com